

PRECOATED GLASS FIBRE DRAPE - HEAVY DUTY

FIRECHIEF®
making the world a safer place

MODEL:

HS1306-1

HS1306-2

HS1306-3

HS1306-4

HS1306-5

HS1306-25 (ROLL)

HS1306-50 (ROLL)



- Protects from molten metal splashes
- Ideal for use during cutting and welding operations
- Heavy duty, robust material with superior tensile strength
- For use in areas where oils, greases, acidic liquids and vapours are present
- Withstands penetration by molten metal
- Weight 1220g/m²
- 1.5mm Thickness
- Service Temperature Continuous up to 1000°C, Short term 1500°C
- EN532:1994 Flammability test (10s flame applied to face of vertical sample) - negative reaction to flame



+44 (0) 330 999 0019



sales@firechiefglobal.com



firechiefglobal.com


PRECOATED GLASS FIBRE DRAPE - HEAVY DUTY



These heavy duty drapes are made from pre-coated glass fibre and are made to protect against molten metal splashes.

Their heavy duty design and superior tensile strength make them ideal for use during cutting and welding operations.

- MODEL:**
HS1306-1
HS1306-2
HS1306-3
HS1306-4
HS1306-5
HS1306-25 (ROLL)
HS1306-50 (ROLL)

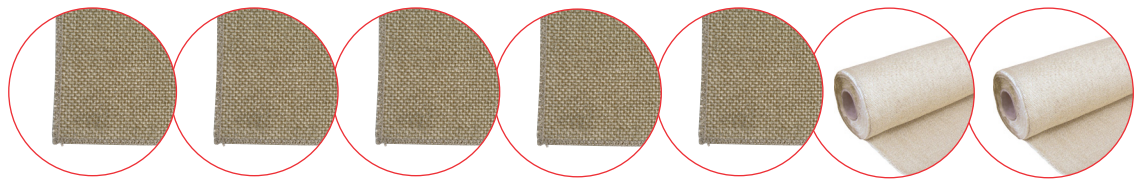

Model	HS1306-1	HS1306-2	HS1306-3	HS1306-4	HS1306-5	HS1306-25	HS1306-50
Product Code	104-1003	104-1004	104-1006	104-1007	104-1008	104-1079	104-1080
Length (m)	1	1	2	2	3	25	50
Width (m)	1	2	2	3	3	1	1
Weight (kg)	1.3	2.5	4.6	6.5	10.2	30.75	61.5
Weight	1230 g/m ²						
Thickness (@ 100g/cm ²)	1.5 mm						
Filament diameter	9µ						
Burst strength (kg/ cm ²)	>50 kg/cm ²						
Air permeability @ 10mm W.G.	1.6 cc/cm ² /sec						
Air permeability @ ½" W.G.	3.9 ft ³ /ft ² /mi						
Shrinkage @ 500°C	0.4%						
Thermal conductivity	0.06 W/m/K						
Resistance to Blowtorch flame @ 1100°C	>30 minutes						
BS476 Pt 8: Stability/ Integrity	140 minutes						

For more information contact: Firechief Global, 3 Lands End Way, Oakham, Rutland, UK, LE15 6RB | Imported into EU by: Sentura Group (Ireland) Ltd, Joyce House, 21-23 Holles Street, Dublin 2, Ireland

+44 (0) 330 999 0019

sales@firechiefglobal.com

firechiefglobal.com